

PAS **iQ Auto-Plus** Ultrasonic Power Supplies were specifically designed for automotive, aerospace, pack-aging and textile industries. To be used with automated systems, the panel mount units are compatible with **iQLinQ™** industrial communication protocol and PAS's patented MPC (Multi-Point Control).

The **iQ** series generators incorporate our patented digital design. Compact in size, they provide the highest power density in the smallest package. Our industry leading 0.5 millisecond multi-core processing speed provides extreme accuracy and repeatability. The unique modular design allows for custom configurations and flexibility.

FEATURES

- **100% digital control** of all power supply functions and parameters allows for unique configurations and future upgrades. Control includes digital frequency synthesis.
- **Industry leading data acquisition rate speed of 0.5 ms** due to advanced multi-core architecture provides for increased weld accuracy and repeatability.
- **EtherNet/IP or Modbus standard**
- **Optional Profibus, PowerLink, Profinet, EtherCAT, CC-Link, or Modbus TCP protocols** allow for flexibility in remote data acquisition and process control. A USB port is included for connection to the PC inter-face software program "iQ Commander".
- **Digi-Trac** tuning automatically tracks the resonant frequency digitally. Adjusts the output frequency to match the acoustic stack (horn, booster, and transducer). This is done for every weld cycle, and eliminates the need to manually tune the generator.
- **Ultrasonic Overload Protection**, with detailed fault description for ease of troubleshooting. The overload power limit is based on true RMS power output level.
- **Line and Load Amplitude Regulation** is maintained independent of load force and incoming line voltage variations. Through a closed-loop amplitude control, the amplitude regulation maintains output amplitude by correcting for fluctuations in line voltage and output power loading. Maintained within 1% to provide weld process consistency and shorter cycle times.

iQ Series

ULTRASONIC POWER SUPPLIES

iQ Auto-Plus



AUTOMATED



HAND PROBE



PRESS




Available in:

**20, 30, 35, and 40 kHz, 600 watts
(100-240 VAC) and 1200 watts in
30 and 35 kHz, (240 VAC)**

- **Highly efficient** (> 92%) power conversion with PFC
- **Universal AC power input** (240 VAC required for power level over 600 W)
- **System Safe Power-up sequence:** 1) AC power inrush protection, 2) Supervisory System Monitor.
- **Optional Weld by Distance Feature** to monitor up to eight analog 0-10 VDC encoders when used with patented MPC (requires customer supplied encoders).
- **Weld by Distance/Energy/Peak Power/Time Limits** for each parameter are monitored to ensure quality and consistency.
- **Patented Trigger by Power** allows for repeatable Weld by Energy, or Collapse Distance modes
- Common Chassis for 600 watt or 1,200 watt units.
- **(1200 watt models include external heat sink)**

iQ Auto-Plus Interface and I/O

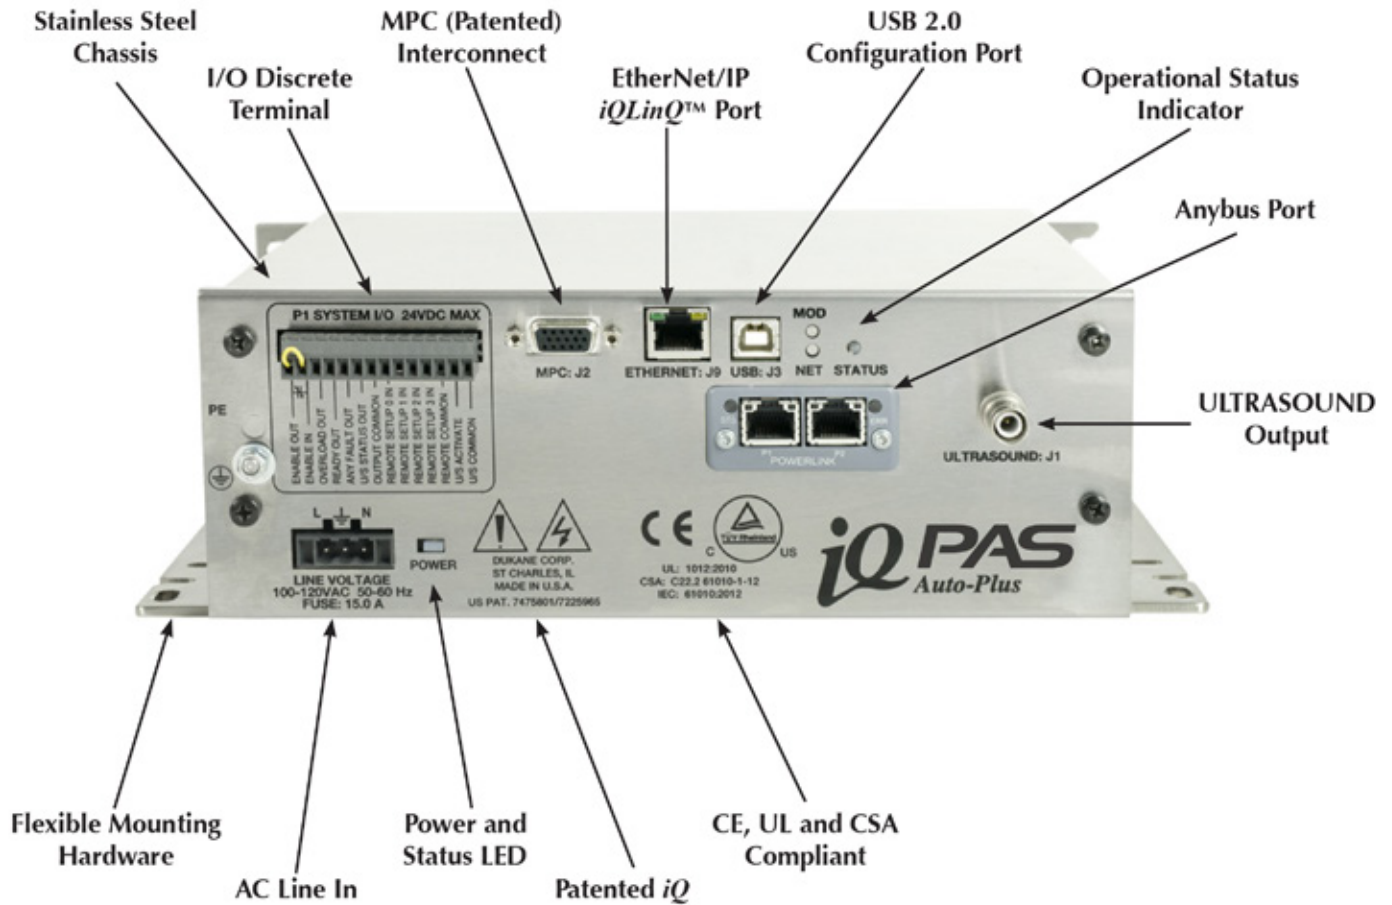


SYSTEM I/O

Pin	Signal Name
1	Enable Out (+22 V Current Limited)
2	Enable In (Jumper to Pin 1, without E-Stop switch)
3	Overload Out (System overload status output)
4	Ready Out
5	Any Fault Out
6	U/S Status Out
7	Output Common (Isolated)
8	Remote Setup 0 input
9	Remote Setup 1 input
10	Remote Setup 2 input
11	Remote Setup 3 input
12	Remote Common (Isolated)
13	U/S Activate
14	U/S Common (Isolated)

Indicator	Appearance	Indication
STATUS	Green – Steady	Ready
	White – Steady	Over Temperature Fault
	Yellow – Steady	E-STOP Active
	Yellow – Blinking	Power Fault
	Orange – Steady	In Cycle
	Orange – Blinking	Ultrasound Voltage Overload
	Red – Steady	Average Overload
	Red – Blinking	Peak Overload
	Blue – Steady	Frequency Overload 1
	Blue – Blinking	Frequency Overload 3
	Purple – Steady	Invalid Auto In
	Purple – Blinking	Cycle Start Rejected
	Red/Green - Blinking	Reduced Power Mode

DIMENSIONS

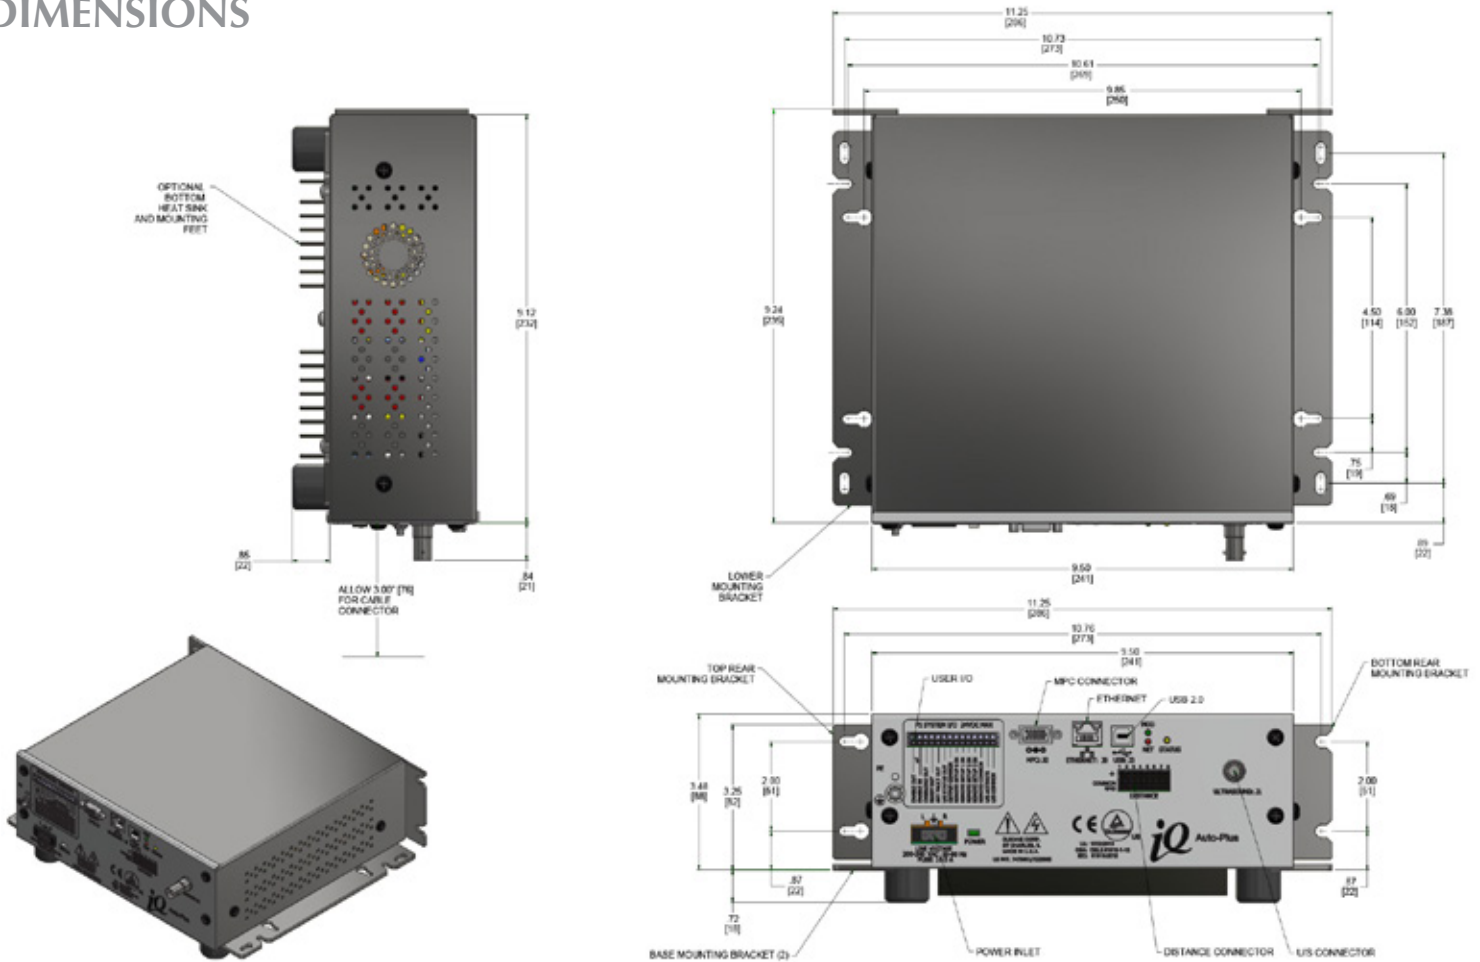

Approximate weight: 4.55 kg (10 lb).

MODELS

Operating Frequency	Generator Model Number	Overload Power Ratings (Watts)	Input AC Power Requirements Nominal AC Volt @ Maximum RMS Current
20 kHz	20AT060-UJ-XX	600	100-240V 50/60 Hz @ 15 amps Max
30 kHz	30AT060-UJ-XX	600	100-240V 50/60 Hz @ 15 amps Max
30 kHz	30AT120-2X-XX	1200	200-240V 50/60 Hz @ 15 amps Max
35 kHz	35AT060-UJ-XX	600	100-240V 50/60 Hz @ 15 amps Max
35 kHz	35AT120-2X-XX	1200	200-240V 50/60 Hz @ 15 amps Max
40 kHz	40AT060-UJ-XX	600	100-240V 50/60 Hz @ 15 amps Max

OPTIONS

- **Patented MPC-Multi-Point Control** (available in configurations of 2, 4, 6, 8, 10, 12, 14, and 16 points)
- **iQLinQ™: EtherNet/IP, Profibus, PowerLink, Profinet, EtherCAT, CC-Link, or Modbus TCP protocols**
- **Eight point distance encoder module**



iQ Auto-Plus easily mounts vertically or horizontally with the flexible mounting hardware. (1200 watt unit must be mounted vertically for proper cooling)